



KAINDL

VISION **FLOORS**



KAINDL

VISION

BJORG



KAINDL

VISION

CHELSEA



KAINDL

VISION
EVOKE CLASSIC



KAINDL

VISION

FARMHOUSE



KAINDL

VISION

GEORGIA



KAINDL

VISION

KANSAS



KAINDL

VISION

PALENA



KAINDL

VISION

PLENO




KAINDL

VISION

OSTANA



30 YEARS
KAINDL GUARANTEE

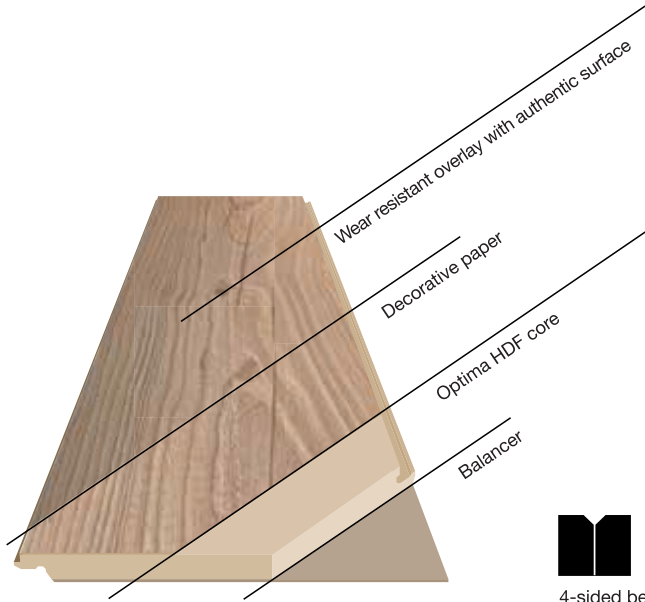

4-sided bevel

Test		Flooring ¹ Symbols	Results
Panel dimension and packaging			Pack: 9pcs. / 2.40 m ² / 17,0 kg 1383x193x8mm
Service category per Standard per	EN 685 EN 13329		32
Abrasion resistance	N 13329		AC4
Impact resistance	EN 13329		≤ 12N ≤ 750mm
Formaldehyde emission of the substrate before coating	EN 120 DIBT-Richtlinie 100		E1
Formaldehyde emission	EN 717-1 EN 717-2		< 0,1ppm < 3,5 mg/h m ²
Floorconstruction			GREENGUARD GOLD
Formaldehyde emission	CARB		CARB Phase 2
Thickness swelling / edge swelling	EN 13329		< 18 %
Thermal conductivity	ISO 8302		0,0780 m ² .K/W
Moisture residue HDF	EN 322		4-7%
Resistance to cigarette burns	EN 438-2.18		grade 4
Light fastness	EN ISO 105-B02 EN 20105-A02		not worse than 6 Blue wool scale not worse than 4 Grey
Lifting resistance	EN 13329		≥ 1 N/mm ²
Cross tensile strength	EN 319		> 1 N/mm ²
Resistance to stains	EN 438-2.15		Group 1-2 Grade 5 Group 3 Grade 4
Combustibility	EN13501-1		Cfl , s1

All values are approximate values - fluctuations cannot be absolutely ruled out.

